


Commercial Gas Meter G16

Exact measurement and security

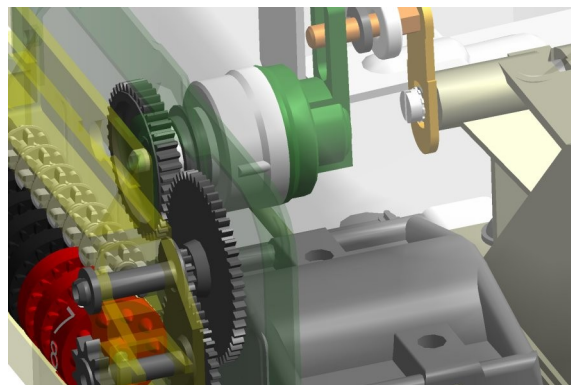

Overview

The gas meter G16 is designed for measurement of gas supplied to industrial plants where maximum consumption of gas is equivalent to 25m³/h of air of density of 1,2 kg/m³.

The gas meters can be used for measurement of:

- Natural gas
- City gas
- Propane-butane gas


Gas meter in its standard version is equipped with pulse magnet. Pulse transmitter (see photo) can be added at any time (1 imp = 0,01m³).




Technical Data

Maximum flow rate:	Q _{max} = 25 m ³ /h
Minimum flow rate:	Q _{min} = 0,16 m ³ /h
Nominal flow rate:	Q _n = 16 m ³ /h
Cyclic volume:	V = 5 dm ³
Max. working pressure:	P _{max} = 0,5 bar
Index max indication	999999,99 m ³
Starting flow rate:	13 dm ³ /h
Weight:	6,8 kg

Dimensions

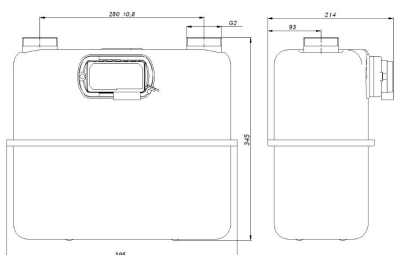

Pressure loss curves

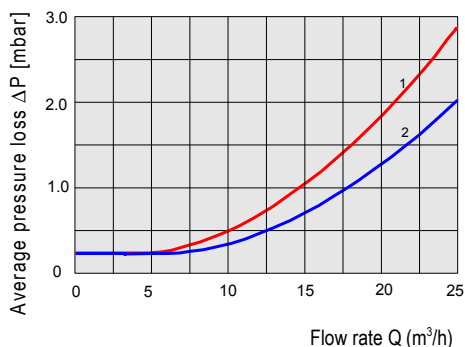

- 1 – air
2 – natural gas

Typical error curves

